Assembly Instructions
Lavenham Wall Light # WLVH0284

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

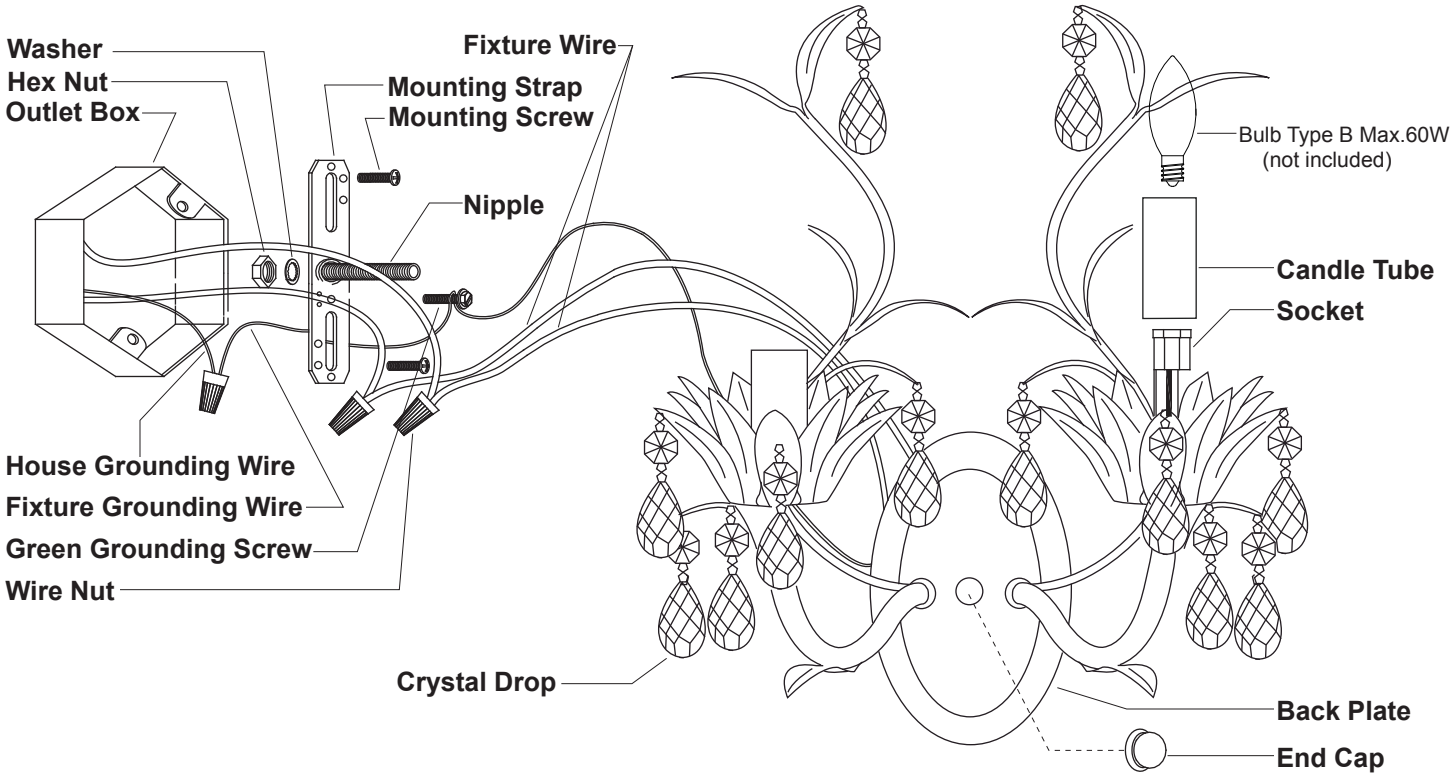

1. Attach the nipple to the mounting strap, then secure it with a washer and hex nut. Adjust the length of the nipple if necessary.
2. Attach the mounting strap to the outlet box by using two mounting screws.
3. Pull out the outlet wires and the house grounding wire from the outlet box. Make wire connections using the wire nuts:
   ---Connect the black wire from the fixture to the black wire from the power source.
   ---Connect the white wire from the fixture to the white wire from the power source.
   ---Attach the fixture grounding wire to the mounting plate with the green grounding screw. Then connect it to the house grounding wire with a wire nut.
   Carefully put the wires back into the outlet box.
4. Attach the back plate to the mounting strap by inserting the nipple, then secure it with the end cap.
5. Attach the candle tubes onto the sockets, then install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
6. Install crystal drops as shown in diagram.
   Note: To replace broken crystal drops -Open the pins to remove the crystal drops, hook the new crystal drops, and then close back pins. Avoid bending the pins into sharp angle.
7. Turn on the power at the main fuse or circuit breaker box.